

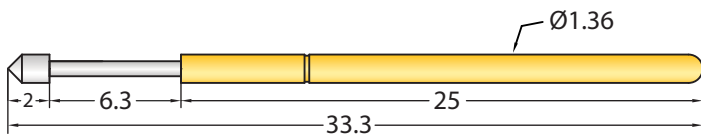
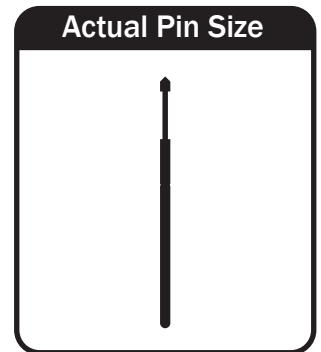

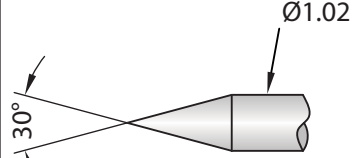





P100 - Series


DIMENSIONS - mm



| | | | |
|---|--|---|--|
| <p>90° Concave Head</p>  <p>TP-P100-A - L/H</p> | <p>30° Spear Point</p>  <p>TP-P100-B - L/H</p> | <p>90° Convex Head</p>  <p>TP-P100-E - L/H</p> | <p>Serrated Head</p>  <p>TP-P100-H - L/H</p> |
| <p>Crown Head</p>  <p>TP-P100-V - L/H</p> | <p>Plain Radius</p>  <p>TP-P100-J-H</p> | | |

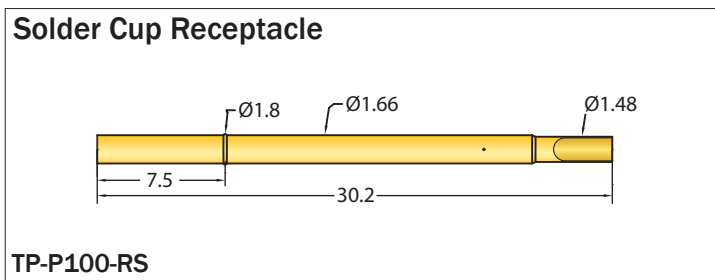

| Technical Data | | |
|-------------------------|--------------|-----------|
| Recommended Min. Center | 2.54mm | |
| Full Travel | 6.30mm | |
| Spring Pressure (± 20%) | Light (L) | 150 grams |
| | Heavy (H) | 250 grams |
| Current Rating | 3A | |
| Contact Resistance | 50 milliohms | |

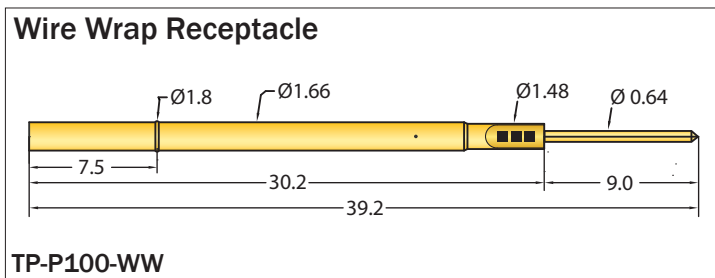

| Materials | |
|------------|--|
| Plunger | Heat-treated Beryllium Copper Rhodium plated over hard Nickel. |
| Barrel | Phosphor Bronze. Gold Plated |
| Spring | Music Wire. Gold Plated |
| Receptacle | Brass or Phosphor Bronze tube. Gold Plated |